




# **EZB-Edge**<sup>®</sup>

 **Made in USA**

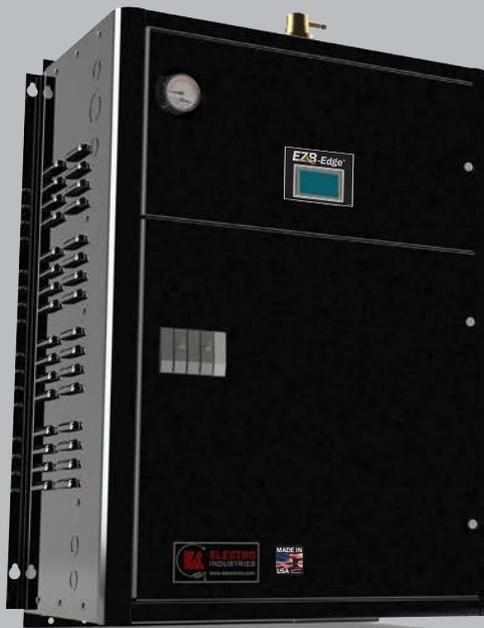

## **100% EFFICIENT ELECTRIC BOILER**

The EZB-Edge, part of Electro's EZBoiler™ line (aka the HeatSoEasy™ line), is the complete solution for hydronic heating systems, designed with the contractor in mind. It is simply the easiest boiler to install!

**AVAILABLE 2021**



**NORTH AMERICA'S LEADER IN ELECTRIC HEATING TECHNOLOGY**

The EZB-Edge is a complete boiler system for radiant floor heating or hot water baseboard applications. Since it is electric and no venting is required, the system is safe to operate and can be installed anywhere in the home. This provides both safety and convenience to the homeowner. Electro is committed to producing quality products manufactured to the highest standards, and the EZB-Edge is no exception.

The EZB-Edge replaces traditional piping with boiler systems. Most major plumbing components are integrated into one compact box, which saves on installation labor and valuable wall or floor space. Just hang the boiler on a wall and pipe down to the radiant manifold; it's that easy!

## FEATURES

- » kW Output 5 to 20 kW
- » Btu/h Output 17,000 to 68,200 Btu/h
- » Temperature Sensing
- » WarmFlo Modulation Control
- » Dual Fuel Control
- » Outdoor Reset Capability
- » Single Zone or 4-Zone Controller for Valves or Pumps
- » ETL/Intertek Listed
- » ASME H-Stamp Vessel (Built in accordance to ASME Section IV)
- » 2-Year Parts Warranty
- » 20-Year Vessel and Element Warranty

## APPLICATIONS


- » Basements
- » Slab on Grade
- » Garages/Sheds
- » Room Additions



## COMPONENTS INCLUDED

- » ASME Pressure Vessel
- » Incoloy Heating Elements
- » Pressure/Temperature Gauge
- » Temperature Sensors: Supply, Return & Outdoor
- » Auto Reset Hi-Limit, 190° F
- » Manual Reset Hi-Limit, 205° F
- » 30 psi Relief Valve
- » Air Eliminator
- » Pre-charged 12 psi Expansion Tank
- » Circulating Pump with Isolation Flanges
- » Circuit Breakers
- » Touch Screen Control Board

## TOUCH SCREEN DISPLAY

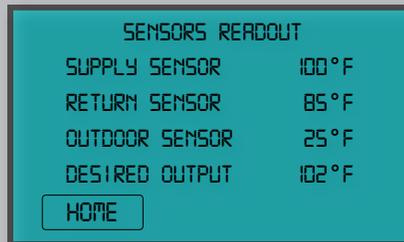

## SPECIFICATIONS

Model	kW	Btu/h	Amps	Voltage	Phase	Breakers	Max Op Temp
EZB-E*-05-240-1	5	17,000	20.8	240/208	1	30A	180° F
EZB-E*-07-240-1	7	23,800	29.2	240/208	1	45A	180° F
EZB-E*-10-240-1	10	34,100	41.7	240/208	1	60A	180° F
EZB-E*-12-240-1	11.5	39,200	47.9	240/208	1	60A	180° F
EZB-E*-15-240-1	15	51,100	62.5	240/208	1	60A, 30A	180° F
EZB-E*-17-240-1	17.5	59,700	72.9	240/208	1	60A, 45A	180° F
EZB-E*-20-240-1	20	68,200	83.3	240/208	1	60A, 60A	180° F

\*1 = 1 Zone 4 = 4 Zones

TO LOCATE A CONTRACTOR OR  
DISTRIBUTOR IN YOUR AREA VISIT  
[WWW.ELECTROMN.COM](http://WWW.ELECTROMN.COM) AND CLICK ON  
DEALER FINDER

All specifications subject to ELECTRO INDUSTRIES STANDARD TERMS  
AND CONDITIONS, download at [www.electromn.com/terms.pdf](http://www.electromn.com/terms.pdf).



**ELECTRO  
INDUSTRIES**

Monticello, Minnesota  
800.922.4138  
[www.electromn.com](http://www.electromn.com)