

Specification Data Sheet - EZBoiler™ Series (aka HeatSoEasy™)

STANDARD EQUIPMENT

EZB-Eco - EZB-T1-*

- ASME Pressure Vessel
- Incoloy Heating Elements
- Pressure/Temperature Gauge
- Temperature Sensors: Supply & Outdoor
- Hi-limits: 1st - automatic reset at 190° F
2nd - manual reset at 205° F
- 30 psi Relief Valve
- Air Eliminator

- Pre-charged 12 psi Expansion Tank
- Circulating Pump with Isolation Flanges
- Circuit Breakers
- Made in the USA

EZB-Edge - EZB-E*-*

- Same as EZB-Eco-** PLUS
- Touch Screen Control Board
- Return Water Temperature Sensor

WATER FLOW REQUIREMENTS (MINIMUM 2 GPM WATER FLOW THROUGH BOILER)

Model	Water Temperature Rise											
	Flow - 10° F/6° C		Head Loss		Flow - 20° F/11° C		Head Loss		Flow - 30° F/16° C		Head Loss	
	gpm	lpm	ft	m	gpm	lpm	ft	m	gpm	lpm	ft	m
EZB-**-05-240-1	3.07	11.60	.06	.018	1.53	5.78	.02	.006	1.02	3.85	.02	.006
EZB-**-07-240-1	4.78	18.06	.12	.036	2.39	9.03	.06	.01	1.59	6.01	.02	.006
EZB-**-10-240-1	6.82	25.82	.01	.003	3.41	12.91	.004	.001	2.27	8.59	.001	.001
EZB-**-12-240-1	7.80	29.53	.02	.006	3.92	14.84	.007	.002	2.60	9.84	.002	.001
EZB-**-15-240-1	10.23	38.73	.03	.009	5.11	19.34	.01	.003	3.41	12.91	.004	.001
EZB-**-17-240-1	11.90	45.05	.05	.015	5.97	22.60	.01	.003	3.98	15.02	.007	.002
EZB-**-20-240-1	13.65	51.66	.07	.02	6.82	25.01	.02	.006	4.55	17.22	.01	.003

** = T1, E1, or E4 Note: Head Loss based on 110° F return temperature.

ELECTRIC SUPPLY

Model	Volts	Phase	kW	Watts	Btu/h	Amps	CB [†]
EZB-**-05-240-1	240/208	1	5/3.8	5,000/3,800	17,000/12,750	20.8	30A
EZB-**-07-240-1	240/208	1	7/5.3	7,000/5,300	23,800/17,850	29.2	45A
EZB-**-10-240-1	240/208	1	10/7.5	10,000/7,500	34,100/25,575	41.7	60A
EZB-**-12-240-1	240/208	1	11.5/8.7	11,500/8,700	39,200/29,400	47.9	60A
EZB-**-15-240-1	240/208	1	15/11.3	15,000/11,300	51,100/38,325	62.5	60A + 30A
EZB-**-17-240-1	240/208	1	17.5/13.2	17,500/13,200	59,700/44,775	72.9	60A + 45A
EZB-**-20-240-1	240/208	1	20/15	20,000/15,000	68,200/51,150	83.3	60A + 60A

** = T1, E1, or E4 † Canadian models include single feed bus option where applicable.

CLEARANCES

	MINIMUM CLEARANCE		SUGGESTED MINIMUM SERVICE CLEARANCE	
LEFT SIDE	1 INCH	26 MM	12 INCHES	305 MM
RIGHT SIDE	1 INCH	26 MM	12 INCHES	305 MM
BACK	REQUIRED CLEARANCE - 0 INCHES/0 MM			
FRONT	REQUIRED CLEARANCE - 6 INCHES/153 MM			
TOP	REQUIRED CLEARANCE - 14 INCHES/356 MM			
BOTTOM	REQUIRED CLEARANCE - 14 INCHES/356 MM			
SURROUNDING AMBIENT TEMPERATURE MUST NOT EXCEED 90°F/32°C.				

WEIGHT



Model	Weight (lbs)	Model	Weight (lbs)
EB-**-05-240-1	140	EB-**-15-240-1	140
EB-**-07-240-1	140	EB-**-17-240-1	140
EB-**-10-240-1	140	EB-**-20-240-1	140
EB-**-12-240-1	140		

** = T1, E1, or E4



ELECTRO INDUSTRIES
Monticello, Minnesota
800.922.4138
www.electromn.com

DIMENSIONS ARE: [mm]
IN.

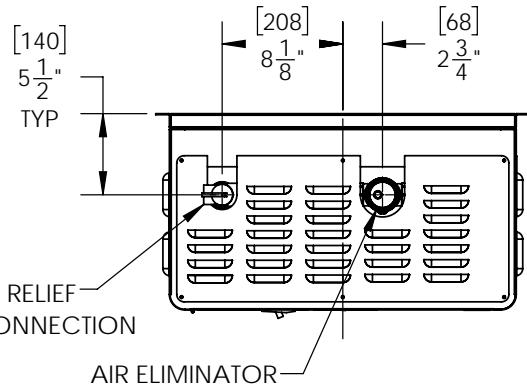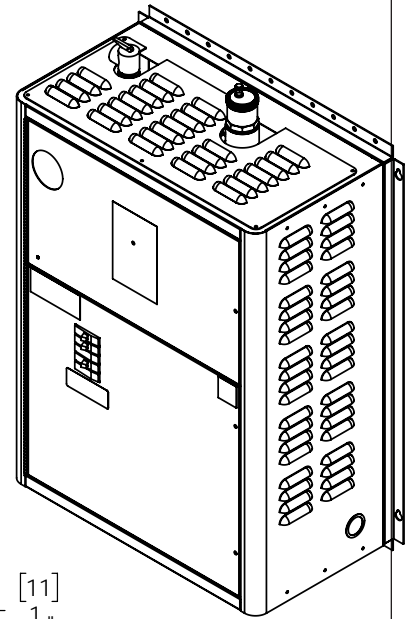

MOUNT THIS END UP ↑

